

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
30V	210m Ω @4.5V	1.2A
	260m Ω @2.5V	


Feature

- Trench Technology Power MOSFET
- Low $R_{DS(ON)}$
- Low Gate Charge
- ESD Protect

Application

- Load Switch
- DC/DC Converter

MARKING:

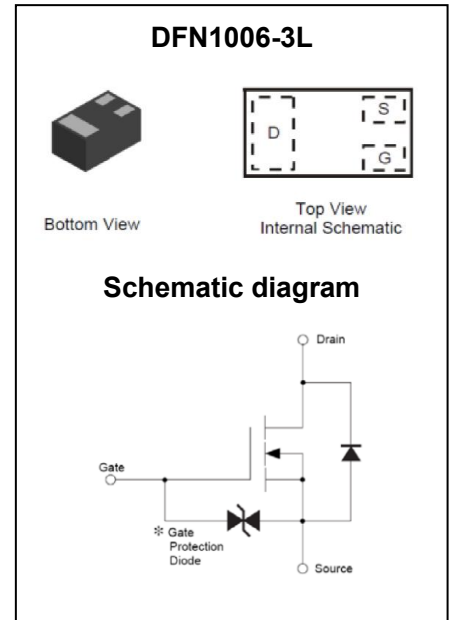

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 10	V
Continuous Drain Current ^{1,5}	I_D	$T_C = 25^\circ\text{C}$	1.2
		$T_C = 100^\circ\text{C}$	0.76
Pulsed Drain Current ²	I_{DM}	4.8	A
Power Dissipation ^{4,5}	P_D	0.75	W
Thermal Resistance from Junction to Ambient ⁵	$R_{\theta JA}$	165	$^\circ\text{C/W}$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55~ +150	$^\circ\text{C}$







MOSFET ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)




Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = 250μA	30			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 30V, V _{GS} = 0V			1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} = ±10V, V _{DS} = 0V			±10	μA
On Characteristics³						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	0.4	0.7	0.9	V
Drain-Source On-Resistance	R _{DS(on)}	V _{GS} = 4.5V, I _D = 0.5A		210	280	mΩ
		V _{GS} = 2.5V, I _D = 0.3A		260	350	
Dynamic Characteristics⁴						
Input Capacitance	C _{iss}	V _{DS} = 15V, V _{GS} = 0V, f = 1MHz		51		pF
Output Capacitance	C _{oss}			4		
Reverse Transfer Capacitance	C _{rss}			3		
Switching Characteristics⁴						
Total Gate Charge	Q _g	V _{DS} = 15V, V _{GS} = 4.5V, I _D = 1A		1.3		nC
Gate-Source Charge	Q _{gs}			0.3		
Gate-Drain Charge	Q _{gd}			0.3		
Turn-On Delay Time	t _{d(on)}	V _{DD} = 15V, V _{GS} = 4.5V, I _D = 0.7A, R _G = 51Ω		5		ns
Turn-On Rise Time	t _r			8.2		
Turn-Off Delay Time	t _{d(off)}			23		
Turn-Off Fall Time	t _f			41		
Source-Drain Diode Characteristics						
Diode Forward Voltage ³	V _{SD}	V _{GS} = 0V, I _S = 0.7A			1.2	V

Notes :

- 1.The maximum current rating is limited by package.
- 2.Pulse Test : Pulse Width ≤ 10μs, duty cycle ≤ 1%.
- 3.Pulse Test : Pulse Width ≤ 300μs, duty cycle ≤ 2%.
- 4.The power dissipation P_D is limited by T_{J(MAX)} = 150°C.
- 5.Device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with T_A = 25°C.

Typical Characteristics

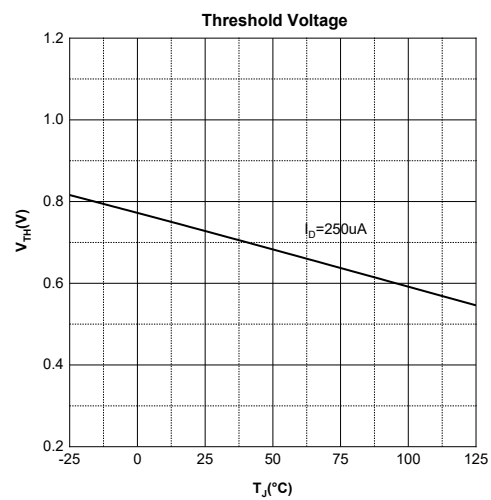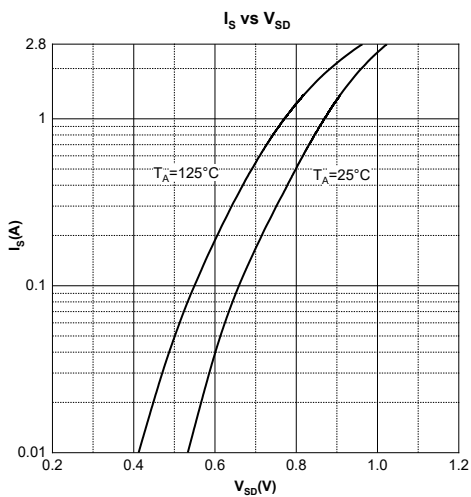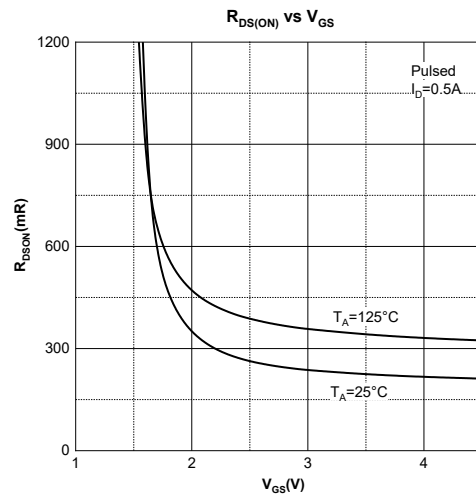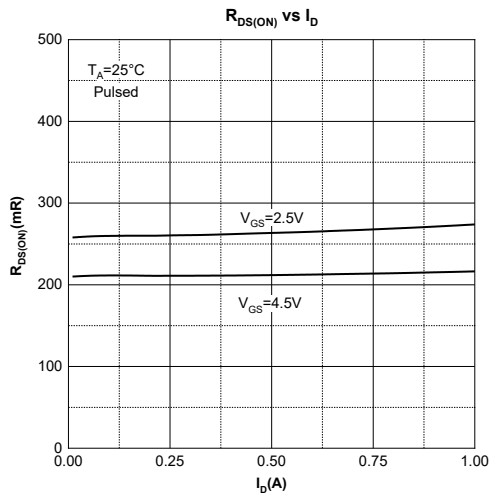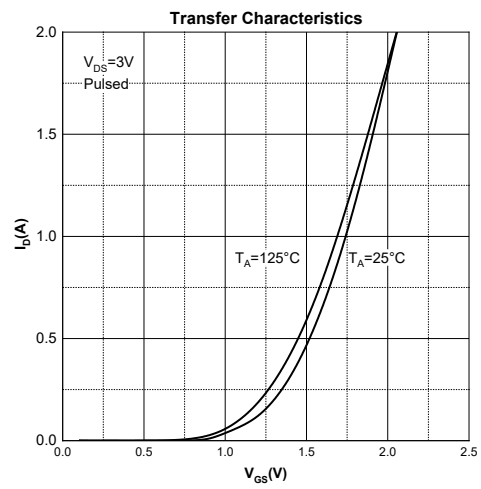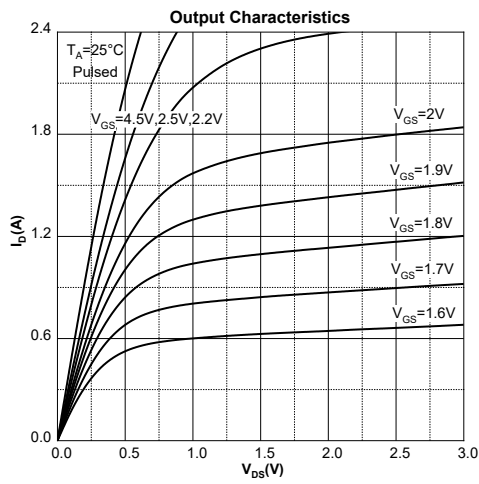

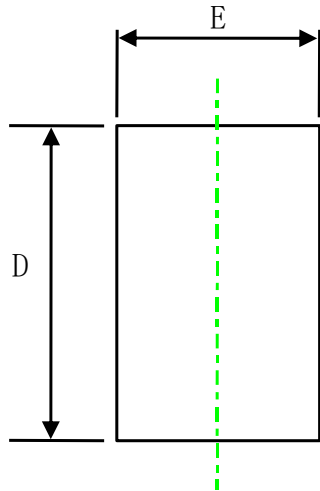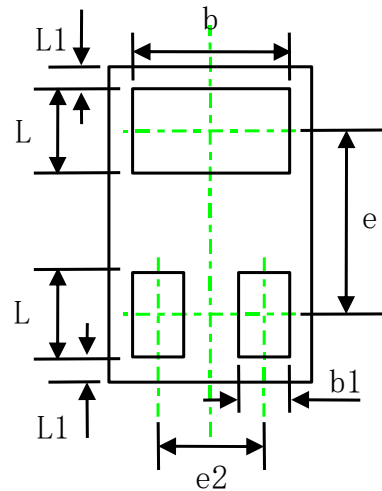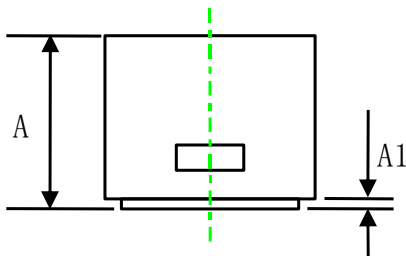DFN1006-3L Package Information

 TOP VIEW
 [顶视图]

 BOTTOM VIEW
 [底视图]

 SIDE VIEW
 [侧视图]

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.400	0.550	0.016	0.022
A1	0.000	0.050	0.000	0.002
D	0.950	1.050	0.037	0.041
E	0.550	0.650	0.022	0.026
b	0.400	0.600	0.016	0.024
e	0.65 TYP		0.026 TYP	
e2	0.35 TYP		0.014 TYP	
L1	0.05 REF		0.002 REF	
L	0.200	0.300	0.008	0.012
b1	0.100	0.200	0.004	0.008

Attention:

- GreenPower Electronics reserves the right to improve product design function and reliability without notice.
- Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.
- GreenPower Electronics products belong to consumer electronics or other civilian electronic products.